

Programmable electronic dosing pump LMI series B9/C9



B9/C9 series programmable electronic dosing pumps feature highly accurate microprocessor Control, employing a clear liquid crystal display and a 4-key tactile keypad.

B9 series

- Maximum output: 26 l/h
- Maximum pressure: 10.3 bar

C9 series


- Maximum output: 76 l/h
- Maximum pressure: 20.7 bar

Main technical specifications

- Maximum temperature of pumped chemical: 50 °C
- Self priming height: 1.5 m
- Accuracy: $\pm 2\%$ of adjusted output
- Adjustable stroke length: 0 to 100%
Recommended minimum: 10%
- **Adjustable pressure capacity**
An LMI exclusive reducing pump noise, shock, vibration, and wear, prolonging pump life.
- **Manual/External mode select**
The manual stroke rate is adjustable from 1 stroke per hour to 100 strokes per minute.
Stroke length adjustment from 10 to 100%.
On-Off external trigger control.
- **Externally triggerable**
By voltage free switch, transistor, opto-coupler or hall effect sensor.
 - Divide incoming pulses from 1 to 999.
 - Multiply incoming pulses 1 to 999.
 - Batch accumulate to 999 strokes.
- **4-20 mA slope adjustable response**
Fully programmable stroke frequency vs. input signal: 0-100 strokes/min vs. 0-20 mA.
- **Flow monitoring and alarm programmable**
In conjunction with LMI's Digi-Pulse™ Flow Monitor (FM-PRO-9), the pumps self-monitor output and provide an alarm signal in case of fault.

Simple rugged construction

- Thick wall glass fiber or carbon fiber reinforced thermoplastic construction plus integrated metal-plastic structural and magnetic components result in vibration and shock resistance not ordinarily found in competitive products.
- Strong automotive type wire and electrical connectors add to its construction strength.

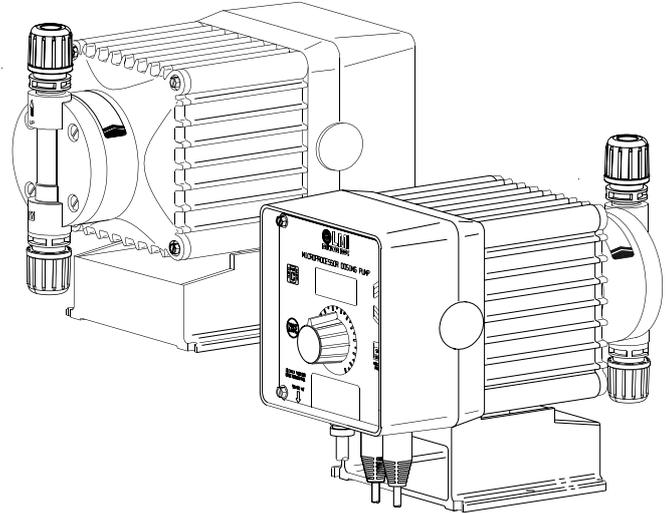

Programmable electronic dosing pump LMI series B9/C9


Totally enclosed corrosion resistant IP65

- O-Ring sealed corrosion resistant enclosure of glass fiber reinforced polypropylene protects the pump from harsh chemicals and tough environments.

Complete with accessories

- LMI B9 / C9 dosing pumps come complete with:
 1. injection check valve,
 2. foot valve,
 3. ceramic weight,
 4. external pulse control cable.
- Most models are also available with factory tubing.

ACCESSORIES

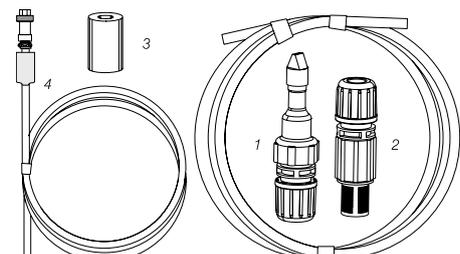

All pumps come complete with these accessories.

Specifications

Model	Output (l/h) max.	Pressure (bar) max.	Liquifram size (Inch ²)	Stroke capacity (ml)		Frequency (str./h)		Liquid end body / Seats material						Tubing connections	
				min.	max.	min.	max.	PVC/Aflas	PVDF/Aflas	PVDF/PTFE	Acrylic/Aflas	316L/PTFE ⁽¹⁾	High visc. ⁽²⁾	Inch	Metric
B91*	6.0	10.3	0.9	0.10	1.00	1	6000	398XY	392XY	393XY	390XY	297	85HV	.375"OD	6x8 mm
B92*	9.5	6.9	0.9	0.16	1.58	1	6000	398XY	392XY	393XY	390XY	297	85HV	.375"OD	6x8 mm
B93*	17	3.4	1.8	0.28	2.83	1	6000	368XY	362XY	363XY	360XY	277	75HV	.375"OD	6x8 mm
B94*	26	2.0	3.0	0.44	4.42	1	6000	318XY	312XY	313XY	310XY	27	25HV	.500"OD	9x12 mm
C90*	4.9	20.7	0.9	0.08	0.80	1	6000	94S ⁽³⁾	-	-	-	297	-	1/4"NPTm	-
C91*	9.5	10.3	1.8	0.16	1.60	1	6000	368XY	362XY	363XY	360XY	277	75HV	.375"OD	6x8 mm
C92*	15	6.9	1.8	0.25	2.52	1	6000	368XY	362XY	363XY	360XY	277	75HV	.375"OD	6x8 mm
C93*	30.4	4.1	3.0	0.51	5.05	1	6000	318XY	312XY	313XY	310XY	27	25HV	.500"OD	9x12 mm
C94*	76	1.7	6.0	1.26	12.60	1	6000	35T/M ⁽⁴⁾	-	32/M	30/M ⁽³⁾	37	-	.500"OD	9x12 mm

* When ordering, specify the voltage code by using one of the following numbers:

- 1 = 115 V, US plug
- 3 = 230 V, EEC plug
- 5 = 230 V, UK plug
- 7 = 230 V, CH plug
- 8 = 115 V, without plug

⁽¹⁾ 1/4" NPTm connection for 277 and 297 - 1/2" NPTm for 27 and 37



⁽²⁾ .500" OD / 15x23

⁽³⁾ Seats in PTFE


⁽⁴⁾ PP/PTFE

X	Y	Refer to liquid end chart for complete option code
	↓	
	0	Pipe thread 1/2" BSP
	2	Inch tubing
	3	Metric tubing
	4	Reinforced PVC tubing 6x12
B		Bleed 4 function valve included
N		No function valve
S		4 function valve included
T		3 function valve included

Dimensions

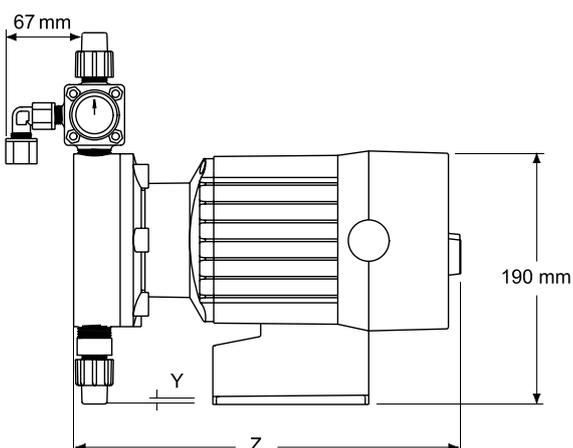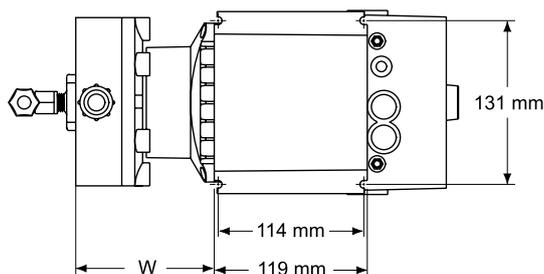

Dimensions	W	X	Y	Z
Pump without function valve	82.5	216	16.5	272
Pump with function valve	115.5	259	16.5	305
Pump with large head (C74)	107	244	0	295
High viscosity pump	90	241	16.5	279
Packings: B = 325 x 235 x 290 mm C = 380 x 235 x 290 mm	Gross Weights: B = 6.9 kg C = 8.7 kg			

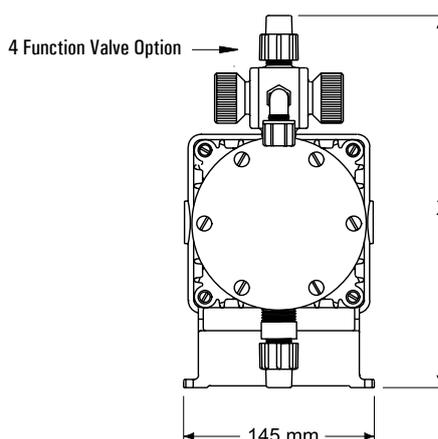

A network of over 100 distributors and sales and service offices.

To find your local representative, visit our website:

www.miltonroy-europe.com